

Avionics

ALT-8000

FMCW/ Pulse Radio Altimeter Flightline Test Set

AEROFLEX
A passion for performance.



Versatile time saving portable test set for testing installed FMCW and Pulse Radio Altimeters

- Tests FMCW radio altimeters including CDF types
- Tests pulse radio altimeters (non-pulse compression types)
- Direct-connect to UUTT/R or to installed system via antenna couplers
- Ratio-metric RF loop test allows TX, RX, antenna or feeder faults to be identified
- Multi-channel operation (via additional test sets)
- Programmable multi-leg climb/descend profiles
- Large touch-screen display with simple user interface
- Remote control interface (Ethernet)
- Lightweight and compact <10 lbs. (4.5 kg)
- Battery 4 hours plus duration

ALT-8000

The ALT-8000 Radio Altimeter Flightline Test Set may be quickly connected to the radio altimeter installation via two antenna couplers. RF simulation of radio altitude from -20 ft. to 8,000 ft. (± 1.5 ft. accuracy) is provided, and altitude rate may be set to provide a smooth ramping altitude simulation to verify decision heights and altitude trips for auto-land systems and altitude data feed to EGPWS.

The ALT-8000 is designed to be software upgradable.



General

The user interface is a Windows-based application that provides various screens for control of the test set and display of parametric measurements including: TX power, TX frequency (center), sweep rate, TX pulse width (pulse systems).

Simulation

RF level may be set manually for specific receiver sensitivity measurement or auto RF level mode sets an RF level based on TX power – height path loss – scattering loss. This ensures that the test environment replicates the actual airborne conditions, verifying T/R loop gain and allowing antenna bonding issues (TX-RX cross leakage) to be identified. An additional level offset figure may be set to ensure an altitude sweep passes with a predetermined gain margin.


Simulated static altitude may be set by the user and manually incremented or decremented.



Profiles


Profiles are used to control dynamic altitude simulations.

The profile screen allows the user to create, save, recall or delete named profiles. Each profile is comprised of individual legs. Start, stop altitudes and rates are definable for each leg. A profile can then be executed to simulate a complete landing approach including flare out or a take-off and departure.

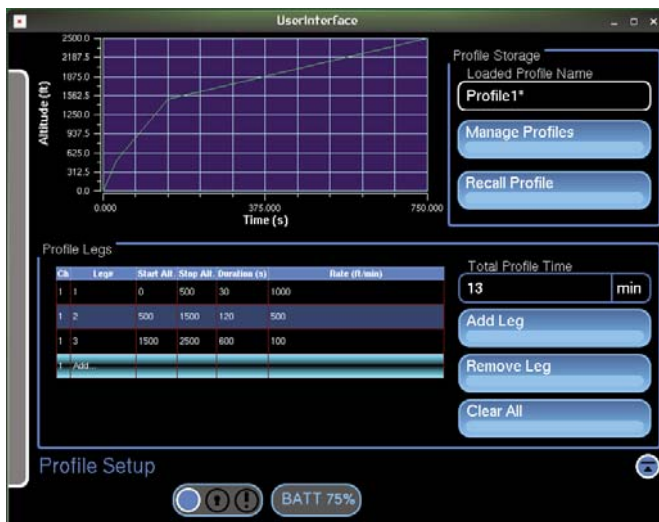


RF Coupling

The supplied antenna couplers allow the radio altitude system to be quickly verified without access being required to test ports on the UUT LRU. Direct-connection to the T/R unit is also possible.



Multi-Channel Operation (Phase II)

Up to three test sets may be linked via an altitude sync line for executing 2 or 3 channel coordinated altitude simulation for auto-land system testing.

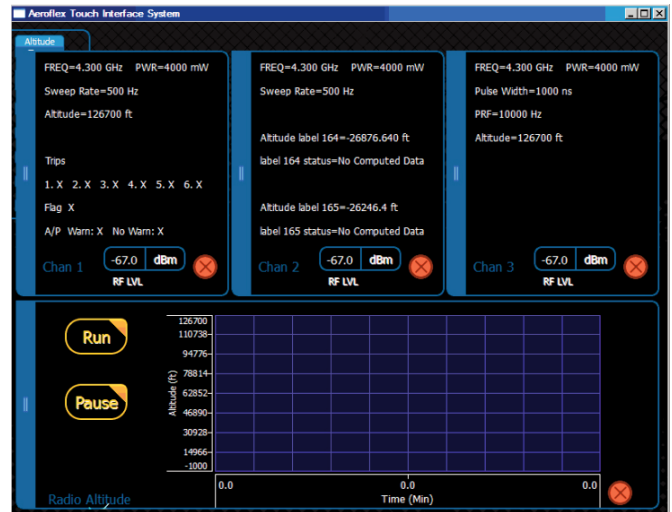

Test Setup

The test setup screen allows system, user and RF connection parameters to be set by the user, including: type, UUT detect mode, level mode, connection type, AID, RF cable loss and altitude offset.



GENERAL SPECIFICATIONS

USER INTERFACE

Display

12" Color LCD, sunlight readable with back light

Controls

Touch screen

ANTENNA COUPLER

Antenna Couplers

TX and RX coupler

Loss Compensation

0 to 20 dB

TX/RX DIRECT CONNECTION PORTS

Impedance

50 Ω

SWR

1.3:1 maximum

Connector

TNC x 2 (single TX/RX channel)

RECEIVER

RF Input Frequency

Range

4.20 to 4.40 GHz (ITAR limited)

FMCW/CDF FMCW

Frequency Measurement

Range

4.20 to 4.40 GHz (ITAR limited)

Accuracy

± 5 MHz

RF TX Power Input Tracking

Range

10 mW (+10 dBm) to 2 W (+33 dBm)

RF TX Power Measurement

Range

4 mW (+6 dBm) to 2 W (+33 dBm)

Accuracy

± 2 dB

FM Sweep Rate Measurement

Range

50 to 200 Hz (pre CDF release)

Range 10 to 2000 KHz (post CDF release)

Range 10 to 6.700 KHz (follow on release)

Accuracy

± 5 Hz

FM Deviation

Range

20 to 100 MHz

PULSE

Frequency Measurement

Range

4.20 to 4.40 GHz (ITAR limited)

Accuracy

± 20 MHz

HRRR TX Power Measurement

Range

1 W to 300 W peak

TX Pulse Width Measurement

Range

20 ns to 400 ns

TX Pulse PRF Measurement

Range

0 to 20 KHz

GENERATOR

Linear Altitude Simulation

Range FM/CW

-15 to 5,000 ft. (pre CDF release)

Range FM/CW

-20 to 8,000 ft. (post CDF release)

Range Pulse

TBC

Note: Limited by connecting RF coax cable length

Resolution

1 ft. increments

Accuracy

± 1.5 ft. or 2% RMS (whichever is greater)

Linear Altitude Rate

Range

1 to 10,000 fpm

Resolution

1 fpm increments

Test Cable (Automatic Compensation)

Test Cable length

1 to 100 ft.

Test Cable Loss

0 to 9.9 dB

AID (Direct Connect)

Fixed Selectable

20, 40, 57 or 80 ft.

User Entered

0 to 100 ft.

Offset (coupler connect)

0 to 50 ft.

RF Level**Manual Mode (FM/CW)****Range**

7 to -83 dBm

Accuracy

±4 dB

Manual Mode (Pulse)**Range**

17 to -73 dBm

Accuracy

±3 dB

Auto Mode

TX Power – Height path loss- Scattering loss- Offset

RF Level Offset (auto mode)

0 to 10 dB

RF Path Loss Simulation

0 to 5,000 ft. (pre CDF release)

0 to 8,000 ft. (post CDF release)

Frequency Stability

±1 ppm

ENVIRONMENTAL**Test Set Certifications****Operational Temperature**

-20° ≤ T ≤ 55°C

Storage Temperature

-30° ≤ T ≤ 71°C

Operational Humidity

MIL-PRF-28800F Class 2

Storage Humidity

MIL-PRF-28800F Class 2

Altitude

≤10,000 meters

Vibration Limits

MIL-PRF-28800F Class 2

Shock, Functional

MIL-PRF-28800F Class 2

Transit Drop

MIL-PRF-28800F Class 2

Drip Proof

MIL-PRF-28800F Class 2

Dust

MIL-PRF-28800F Class 2

Salt

MIL-PRF-28800F Class 2

Explosive Atmosphere

MIL-STD-810F Method 511.4, Procedure 1

Safety Compliance

UL-61010:2001

CSA 22.2 No 1010.1

WEEE

ROHS

EMC

Emissions

MIL-PRF28800F Class 2

EN 61326:1998 Class A

EN 61000-3-2

EN 61000-3-3

Immunity

MIL-PRF28800F Class 2

EN 61326:1998 Class A

External AC-DC Converter Certifications**Safety Compliance**

UL 1950 DS

CSA 22.2 No. 234

VDE EN 60 950

EMI/RFI Compliance

FCC Docket 20780 Curve "B"

EMC EN 61326

Transit Case Certifications**Drop Test**

FED-STD-101C Method 5007.1

Paragraph 6.3, Procedure A, Level A

Falling Dart Impact

ATA 300 Category I

Vibration, Loose Cargo

FED-STD-101C Method 5019

Vibration, Sweep

ATA 300 Category I

Simulated Rainfall

MIL-STD-810F Method 506.4

Procedure II of 4.1.2

FED-STD-101C Method 5009.1 Sec 6.7.1

Immersion

MIL-STD-810F Method 512.4

ENVIRONMENTAL (SUPPLIED EXTERNAL AC TO DC CONVERTER)

86196

Spare battery pack

89022

Maintenance Manual CD

Use

Indoors

Altitude

≤10,000 meters

Operating Temperature

5° to 40°C

Storage Temperature

-20° to 71°C

PHYSICAL CHARACTERISTICS**DIMENSIONS****Height**

10.63 inches (27.0 cm)

Width

13.97 inches (35.5 cm)

Depth

3.425 inches (8.7 cm)

Weight (Test set only)

<10 lbs. (4.5 kg)

VERSIONS AND ACCESSORIES

Ordering Number	Description
87340	ALT-8000 Radio Altimeter Test Set

Standard Accessories

88494	Transit case
67374	Power supply
88590	Antenna coupler (qty 2) Antenna pole assembly (qty 2)
88511	Low loss RF coax cable 20 ft. (qty 2)
38353	TNC-TNC adapter
62401	1 ft. jumper coax
64020	Power cord, European
62302	Power cord, U.S
88511	Coax, RG400, TNC-TNC, yellow
89527	Coax, RG400, TNC-TNC, red
88035	Operation Manual (CD)

Optional Accessories

88500	Low loss RF coax cable 100 ft. (qty 2) w/ soft-side case
87040	External battery charger

For the very latest specifications visit www.aeroflex.com

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] (21) 5109 5128
Fax: [+86] (21) 5150 6112

CHINA Shenzhen

Tel: [+86] (755) 3301 9358
Tel: [+86] (755) 3301 9356

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 89 99641 0
Fax: [+49] 89 99641 160

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 [4] 115 4501
Fax: [+91] 80 [4] 115 4502

JAPAN

Tel: [+81] (3) 3500 5591
Fax: [+81] (3) 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SINGAPORE

Tel: [+65] 6873 0991
Fax: [+65] 6873 0992

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2011.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.