



CBA 3G-025

800 MHz TO 3.1 GHz 25 WATT

CLASS A BROADBAND AMPLIFIER




- Class A linear and low distortion design
- High reliability gallium arsenide technology
- Mismatch tolerant and unconditionally stable
- Wide instantaneous bandwidth
- Three year parts and labour warranty

Designed specifically for Radiated EMC testing, this mismatch tolerant Class A amplifier delivers power continuously into the poor and variable match typically associated with testing above 1 GHz. Although antennas are usually well matched at these high frequencies, the presence of the EUT in the path of the antenna causes high levels of reflected power which only full Class A amplifiers can tolerate.

Whilst antenna gain is relatively constant, increasing cable losses at the higher frequencies demand increasing power with increasing frequency. Teseq amplifiers are therefore designed to maintain their high linear output power right up to and beyond the defined frequency range.

The GaAs Class A design ensures a high reliability, low distortion linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. A safety interlock connector is provided, which the user can short circuit to ground, to put the amplifier into standby mode. Front panel indicators are provided to indicate over-temperature.

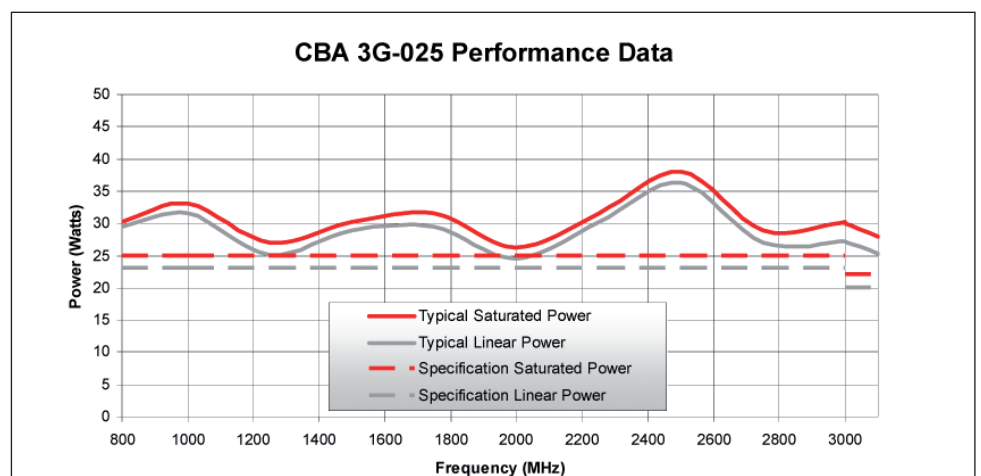

Advanced Test Solutions for EMC



CBA 3G-025

800 MHz TO 3.1 GHz 25 WATT CLASS A BROADBAND AMPLIFIER

Technical specifications

Frequency range (instantaneous)	800 to 3100 MHz
Rated output power	25 W minimum (800 MHz to 3 GHz)
	30 W typical (800 MHz to 3 GHz)
	22 W minimum (3.0 GHz to 3.1 GHz)
	25 W typical (3.0 GHz to 3.1 GHz)
Output power at 1 dB gain compression	23 W minimum (800 MHz to 3 GHz)
	25 W typical (800 MHz to 3 GHz)
	20 W minimum (3.0 GHz to 3.1 GHz)
	22 W typical (3.0 GHz to 3.1 GHz)
Gain	46 dB
Third order intercept point (see note 1)	54 dBm
Gain variation with frequency	±2.5 dB
Harmonics at 23 W output (800 MHz to 3 GHz)	-20 dBc
Output impedance	50 Ohms
Stability	Unconditional
Output VSWR tolerance (see note 2)	Infinite any phase
Input VSWR	2:1
Safety interlock	BNC female, s/c to mute
RF connector style	Type N female
USB interface	Optional
Supply voltage (single phase)	85 to 264 Vac
Supply frequency range	45 to 63 Hz
Supply power	<200 VA
Mains connector	IEC320
Conducted and radiated emissions	EN61326 Class A
Conducted and radiated immunity	EN61326: 1997 Table 1
Mains harmonic currents	EN61000-3-2
Voltage fluctuations and flicker	EN61000-3-3
Safety	EN61010-1
Case dimensions	19 inch, 3U case, 440 mm deep
Mass	14 kg
Operating temperature range	0 to 40°C
Options (select at time of ordering)	
341-718	Bench model with front panel mounted input/output connectors
341-818	Rack mountable with front panel mounted input/output connectors
341-918	Rack mountable with rear panel mounted input/output connectors

Teseq AG
 Nordstrasse 11F 4542 Luterbach Switzerland
 T +41 32 681 40 40 F +41 32 681 40 48
 sales@teseq.com www.teseq.com

© February 2012 Teseq®
 Specifications subject to change without notice.
 Teseq® is an ISO-registered company. Its products
 are designed and manufactured under the strict
 quality and environmental requirements of the ISO
 9001. This document has been carefully checked.
 However, Teseq® does not assume any liability for
 errors or inaccuracies.

691-168A February 2012

Notes:

1. The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
2. Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.

T ESEQ

Advanced Test Solutions for EMC