


# The MILMEGA Series 2000 Broadband Class A Solid State Microwave Amplifier Range

The MILMEGA Series 2000 0.8 GHz-2.5 GHz broadband amplifiers have an award winning innovative design which utilises the latest GaAs FET and MMIC technologies. This provides an architecture with unique features and benefits which differentiate Series 2000 from other solid state amplifiers, permitting an impressive array of input/output and sample port options and cost-effective power or bandwidth upgrades.

## AS0825-85, 85 Watt P1dB 0.8 GHz-2.5 GHz Broadband Amplifier

Psat (min):	95.4 W	Power consumption:	1000 W
Psat (min)	49.8 dBm	Primary Power:	85-260 V (50/60 Hz)
P1dB (min):	85.0 W	RF Input:	Type N female
P1dB (min):	49.3 dBm	RF Output:	Type N female
Noise figure (max):	6.0 dB	Weight:	20 kg
Gain variation:	± 2.0 dB	Size:	3U
Harmonic distortion (max):	-20 dBc		

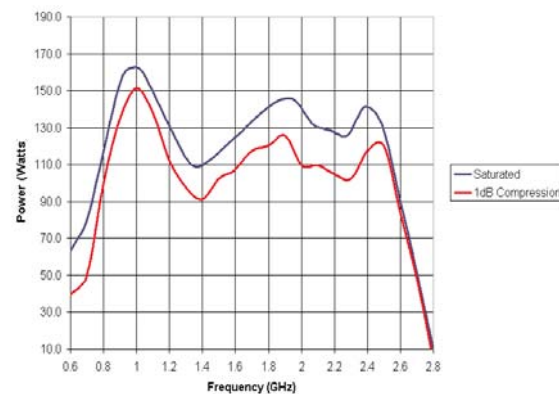

## Class leading linearity and noise specifications

- Gain variation with temperature <math><0.06\text{ dB}/^\circ\text{C}</math>
- IP3 typically 10 dB> P1 dB
- Harmonics -20 dBc max
- Spurious (max) -70dBc
- Spurious (typical) -80 dBc

## Max power

- Unbeatable power density
- Series 2000 will maintain full forward power into any load condition
- Combiner/coupler integration as standard allows samples of incident and reflected power to be measured with virtually no loss
- 100% tested into short and open circuit
- Up to 250 watts in a single 3U unit
- Consistent over greater than octave bandwidths
- Broadband CW power output to 1 kW

## High visibility status and power indicators

- Series 2000 incorporate colour led bar graph displays on the front panel giving an indication of incident and reflected power

## Other standard features

- 15 way rear mounted D-type allowing remote operation via TTL commands whilst providing access to an output signal sample
- All data is measured at 25 °C driven from a 50 R source and driving into a 50 R load
- Input power (for rated output) 5 dBm
- Input power (no damage) 15 dBm
- Input VSWR (impedance 50 R nominal) 2:1 max
- Output VSWR (impedance 50 R nominal) 2:1 typical
- Load VSWR (any phase) is infinite
- Line input frequency 47-65 Hz
- Operating temperature (ambient air) 0 to 40 °C
- Storage temperature -40 to 70 °C.

## Built-in protection

- In the event of internal temperature exceeding 70 °C, the amplifier blocks will automatically switch off to avoid damage
- Unit incorporates a rear panel mounted connector for interlock BR2-female

## Easily rack mounted

- Amplifiers are standard 3U high units and may be combined in rack mounted form to build higher power amplifiers

## Bench models

- 3U high units have bench case options

## Warranty

- 5 year parts and labour warranty on all Series 2000 amplifiers

## Other amplifiers available in the 0.8-2.5 GHz range:

- AS0825-18 – 18 watt P1dB
- AS0825-40 – 40 watt P1dB
- AS0825-170 – 170 watt P1dB
- AS0825-300 – 300 watt P1dB
- AS0825-400 – 400 watt P1dB



Designers and Manufacturers of High  
Power Microwave and RF Amplifiers

